

Starting Procedure (after Preparation)

To restart a warm engine, follow the procedure for High Air Temperature.


Normal Air Temperature

10°–35°C (50°–95°F)

1. Raise the choke lever (3) to the Fully Closed position (A).
2. Open the throttle slightly. (1/8–1/4)
3. Operate the kick starter (5) with a rapid, continuous motion.

CAUTION:

* *Do not allow the kickstarter to snap back freely against the pedal stop as engine case damage could result.*

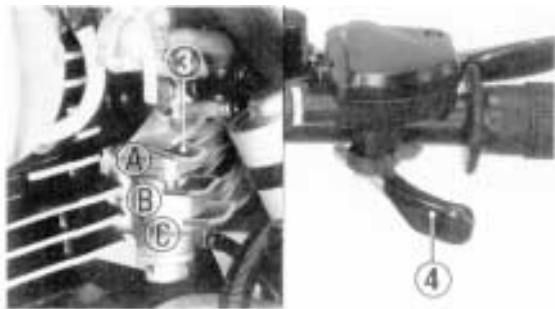

(3) Choke lever

(4) Throttle

4. Immediately after the engine starts, push the choke lever down to the detent position (B).
5. About a half minute after the engine starts, push the choke lever down all the way to Fully Open (C).
6. If idling is unstable, open the throttle slightly.

High Air Temperature

35°C (95°F) or above

1. Do not use the choke.
2. Open the throttle slightly. (1/8–1/4)
3. Start the engine (See Step 3 under Normal Air Temperature).



(5) Kick starter