


mended that lubrication be performed every 6 months or 3,000 miles (5,000 km), whichever occurs first, with **multi-purpose grease, Type NLGI No. 2.**


3. Rear Shock absorber Adjustment

The rear shock absorber ① has three-ranges of adjustment and can be adjusted

to meet the different types of road or riding conditions. Position "I" is for normal riding with the damper spring strength increasing progressively from "II" to "III"; to be used for heavy load conditions or when operating on rough roads

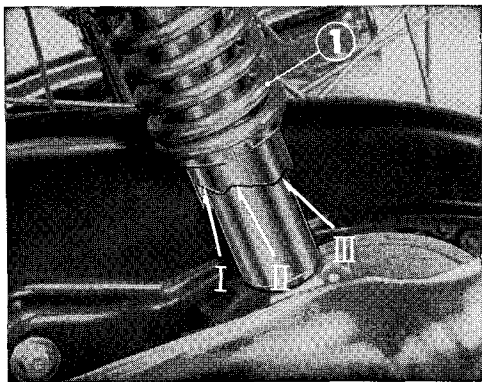

① Rear shock absorber

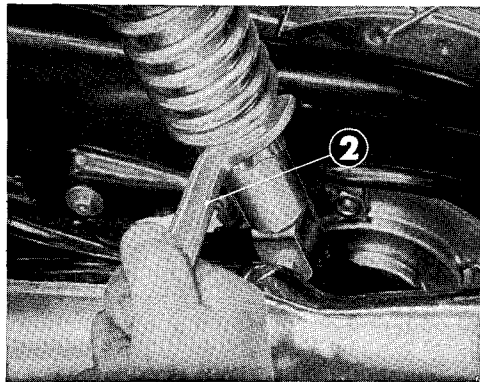

② 45 mm pin spanner