


beam toward the right side. Adjust the beam to coincide with the center line of the motorcycle.

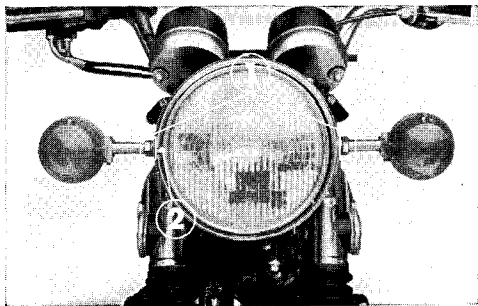

- ① Headlight mounting bolts
- ② Adjusting screw

STOP LIGHT SWITCH ADJUSTMENT

The CB500 is equipped with independent stop light switches for the rear and front brakes. A mechanically actuated pedal switch ① is mounted on the right side toward the rear of the engine for the rear brake system, and a pressure actuated switch ③ at the brake hose joint for the front brake system.

- a. First, make sure that the brakes are properly adjusted.
- b. Turn on the main switch ("RED" dot).
- c. Lower the center stand to clear the rear wheel from the ground, spin the wheel by hand and the stop light should come on when the brake pedal is depressed to the point where the rear brake just starts to take hold. Ad-