


5. Disconnect the negative (-) terminal lead (5) from the battery first, then disconnect the positive (+) terminal lead (6).
6. Pull out the battery (7) from the battery box.

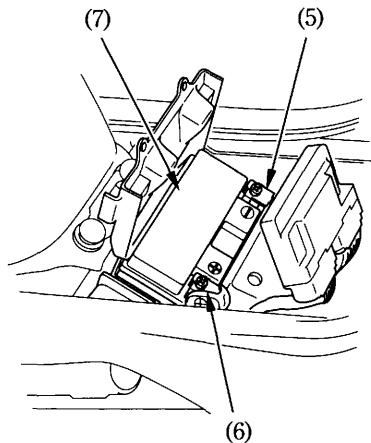

- (5) Negative (-) terminal lead
- (6) Positive (+) terminal lead
- (7) Battery