



6. Remove the water pipe guard (7) by removing the bolt (8).

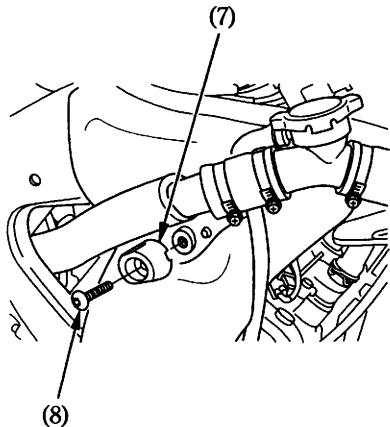

7. Move the radiator (9) out of the way and remove the grommet (10) from the hook (11).  
8. Pull the radiator toward the front.

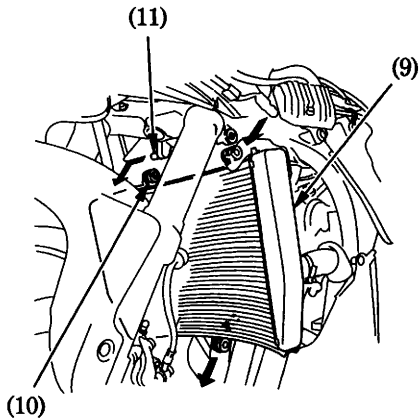

(9) Radiator  
(10) Grommet

(11) Hook

(7) Water pipe guard  
(8) Bolt