


## Starting Procedure

To restart a warm engine, follow the procedure for “High Air Temperature”.

### Normal Air Temperature

10° – 35° C (50° – 95° F)

1. Pull the choke lever (1) up all the way to Fully ON (A).

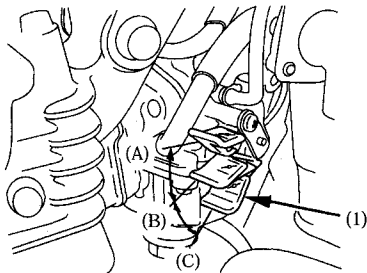

(1) Choke lever

(A) Fully ON

(B) Detent position

(C) Fully OFF

2. Lightly depress the kickstarter until resistance is felt. Then let it return to the top of its stroke. With the throttle closed, operate the kickstarter. Kick from the top of the stroke to the bottom with a fast, continuous motion.
3. Immediately after the engine starts, push the choke lever (1) down to the Detent Position (B).

### **NOTICE**

Extended use of the choke may impair piston and cylinder wall lubrication and damage the engine.

4. Warm up the engine by opening and closing the throttle slightly.
5. About a half minute after the engine starts, push the choke lever (1) down all the way to Fully OFF (C).
6. If idling is unstable, open the throttle slightly.