


Suspension


5. Pour the recommended fork oil into the outer tube (1).



(1) outer tube


Fork Oil Capacity:

Standard 25.12 lbf/in (4.4 N/mm) Fork Spring

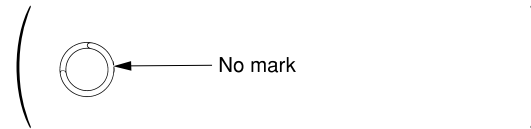


| | | |
|-----------------------|-----------------------------------|--|
| Standard oil capacity | 12.6 US oz (372 cm ³) | |
| Maximum oil capacity | 12.9 US oz (380 cm ³) | Slightly stiffer as it nears full compression. |
| Minimum oil capacity | 10.0 US oz (296 cm ³) | Slightly softer as it nears full compression. |

Optional Softer 23.98 lbf/in (4.2 N/mm) Fork Spring

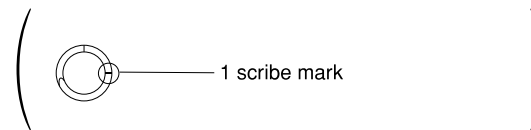

| | | |
|-----------------------|-----------------------------------|--|
| Standard oil capacity | 12.8 US oz (377 cm ³) | |
| Maximum oil capacity | 13.0 US oz (385 cm ³) | Slightly stiffer as it nears full compression. |
| Minimum oil capacity | 10.2 US oz (301 cm ³) | Slightly softer as it nears full compression. |

Optional Stiffer 26.20 lbf/in (4.59 N/mm) Fork Spring

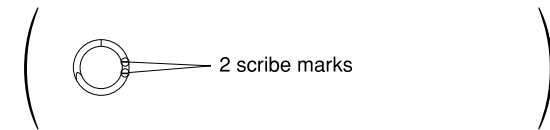

| | | |
|-----------------------|-----------------------------------|--|
| Standard oil capacity | 12.7 US oz (375 cm ³) | |
| Maximum oil capacity | 12.9 US oz (382 cm ³) | Slightly stiffer as it nears full compression. |
| Minimum oil capacity | 10.1 US oz (299 cm ³) | Slightly softer as it nears full compression. |

Be sure the oil capacity is the same in both fork legs.