


Front Suspension Adjustments

27. Install the handlebar (38), mounting rubbers (39), washers and handlebar lower holder nuts (40) and tighten the handlebar lower holder nuts to the specified torque:
32 lbf-ft (44 N·m, 4.5 kgf·m)

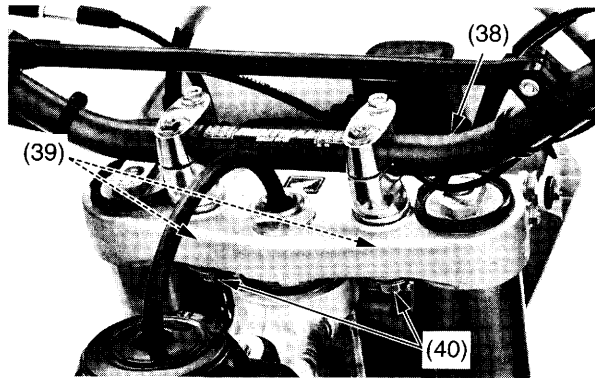

- (38) handlebar
(39) mounting rubbers
(40) washers/handlebar lower holder nuts

28. With the front brake applied, pump the fork up and down several times to seat the axle and check front brake operation.




29. While keeping the forks parallel, alternately tighten the right axle pinch bolts (41) to the specified torque:
15 lbf-ft (20 N·m, 2.0 kgf·m)

NOTICE


To avoid damage when torquing the axle pinch bolts, be sure the axle is seated firmly onto the right fork leg clamp inner surface.

30. Connect the tripmeter cable (42) and tighten the lock nut securely.

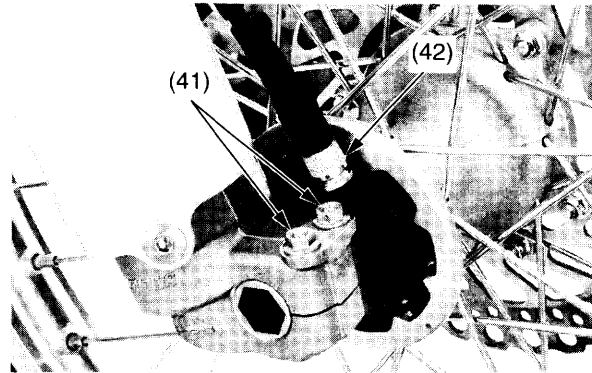


- (41) right axle pinch bolts (42) tripmeter cable

31. Install the disc cover (43) and tighten the disc cover bolts (44) to the specified torque:
10 lbf-ft (13 N·m, 1.3 kgf·m)

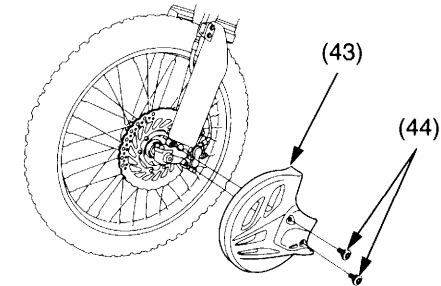

- (43) disc cover (44) disc cover bolts

32. Turn the rebound damping (45) and compression damping (46) adjuster back to their original settings.

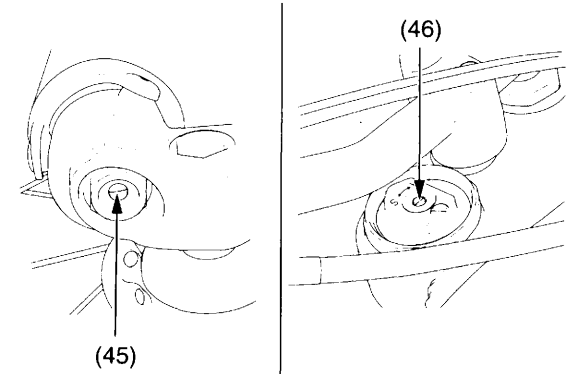

- (45) rebound damping adjuster
(46) compression damping adjuster

33. Install the steering damper (page 101) and handlebar pad.