
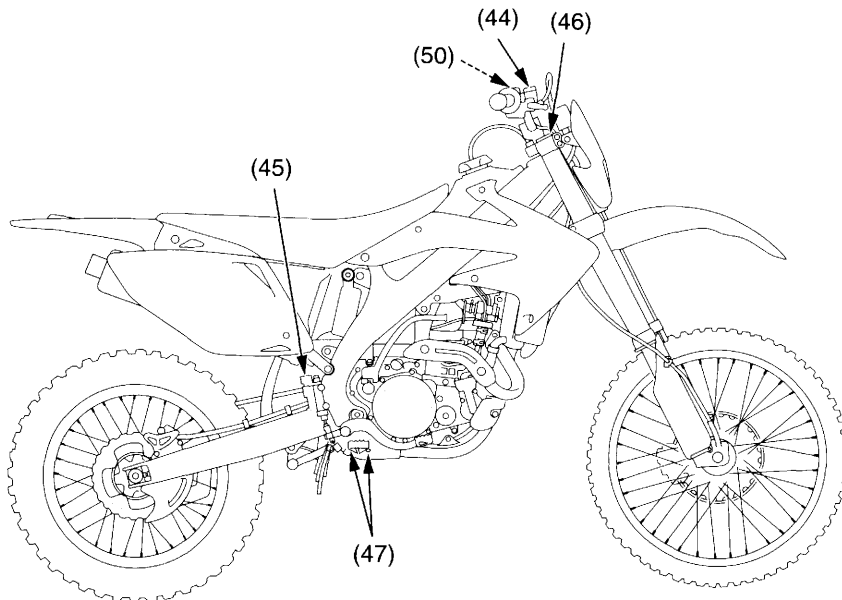


Torque Specifications

Frame

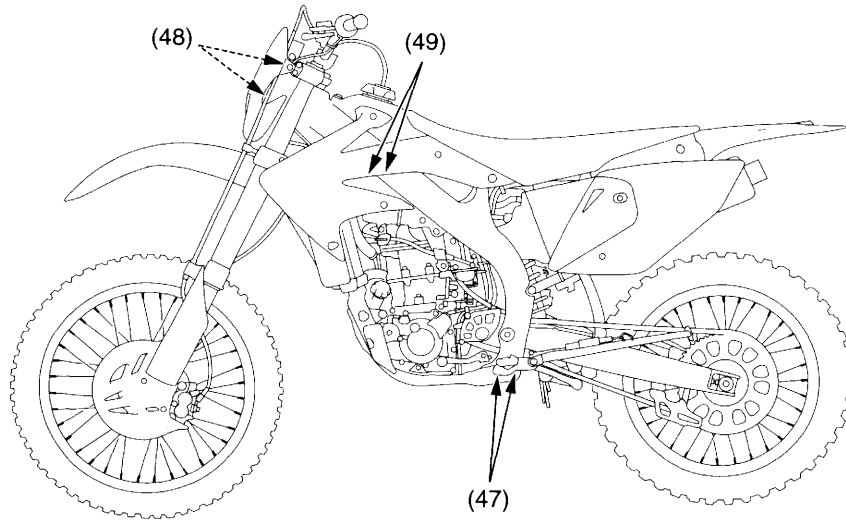

FRAME

Item	Torque			Remarks		
	lbf•ft	N•m	kgf•m			
44	Front brake reservoir cap screws	0.7	1	0.1		
45	Rear brake reservoir cap bolts	0.7	1	0.1		
46	Fork air pressure release screw	0.9	1.2	0.1		
47	Right/left step bracket mounting bolts	(upper)	41	55	5.6	
		(lower)	22	30	3.1	
48	Steering damper mounting bolts	15	20	2.0	NOTE 5	
49	Fuel joint mounting bolts	7	10	1.0		
50	Throttle cable adjuster lock nuts	3.0	4	0.4		

- NOTES:
1. U-nut.
 2. UBS nut.
 3. SH bolt.
 4. Apply locking agent to the threads.
 5. A lock bolt; replace with a new one.
 6. Apply molybdenum oil to the threads and flange surface.
 7. Apply a seizure inhibitor (Three Bond 1901 or equivalent) to the bolt threads.