



Rear

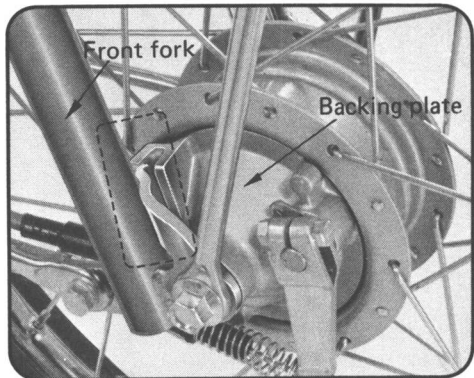

When installing, be sure to fit the tongue of the right fork leg into the groove in the backing plate.

Adjust the front brake to give proper free play (see page 14).

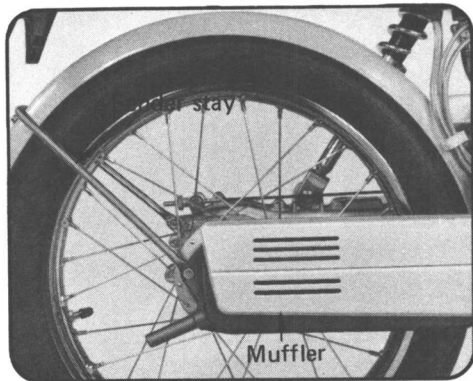

1. Place the motorcycle on its center stand.
2. Remove the muffler and fender stay.