


5. Support the motorcycle securely, raise the rear wheel off the ground.
6. Remove the rear wheel nuts (8).
7. Remove the rear wheel (9) slowly.

Avoid getting grease, oil, or dirt on the disc or pad surfaces. Any contamination can cause poor brake performance or rapid pad wear after reassembly.

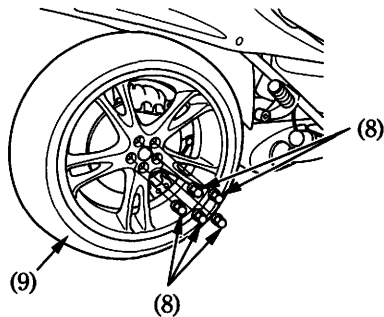

- (8) Rear wheel nuts
- (9) Rear wheel