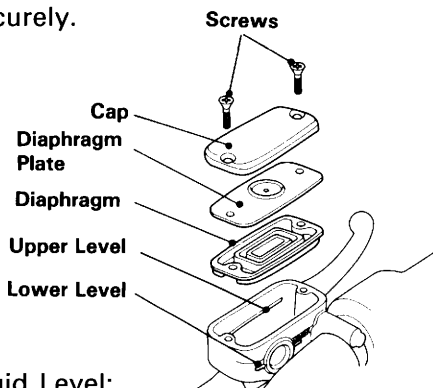

Front Brake Fluid Level:

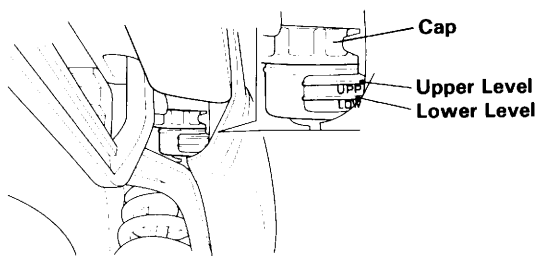
The front brake motor cylinder is located on the right handlebar. Fill the reservoir with DOT 4 BRAKE FLUID from a sealed container up to the upper level mark.

Reinstall the removed parts in the reverse order of removal. Tighten the screws securely.



Rear Brake Fluid Level:

1. Remove the right saddlebag (page 38).
2. Brake fluid must be added to the reservoir whenever the fluid level begins to reach the lower level mark.
3. Remove the cap.
4. Fill the reservoir with DOT 4 BRAKE FLUID from a sealed container up to the upper level mark.
5. Reinstall the removed the cap.



Other Checks:

Make sure there are no fluid leaks. Check for deterioration or cracks in the hoses and fittings.