## STARTING THE ENGINE

## Preparation

- Select a level surface and lock the parking brake (page 25) before starting the engine.
- 2. Turn the fuel cap vent lever (1), fuel valve (2) and ignition switch (3) to ON (1).
- 3. Make sure the engine stop switch (4) is at RUN ( ()).
- 4. Make sure that the transmission is in neutral by checking that the neutral indicator lamp lights.

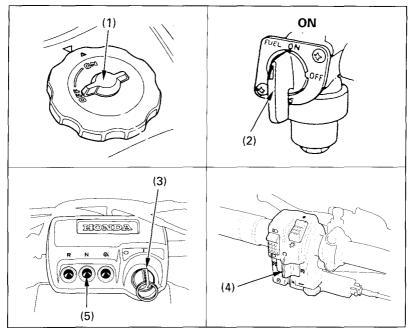


Fig. 3-8

- (1) Fuel cap vent lever
- (2) Fuel valve
- (3) Ignition switch
- (4) Engine stop switch
- (5) Neutral indicator lamp