

# Spark Arrester


---

Refer to *Safety Precautions* on page 93.

The exhaust system must be periodically purged of accumulated carbon. To purge the system:

1. Allow the engine and muffler to cool.
2. Remove the bolts ( 1 ), the spark arrester ( 2 ), and the gasket ( 3 ) from the muffler ( 4 ).

## REAR

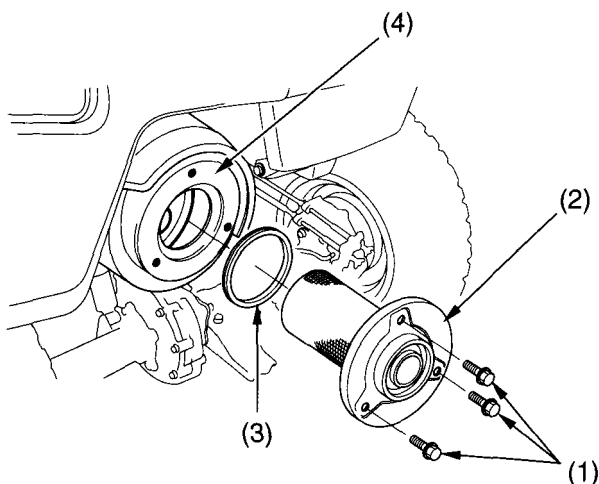

(1) bolts

(2) spark arrester

(3) gasket

(4) muffler