


6. Remove the drive chain (9) from the driven sprocket by pushing the rear wheel forward.
7. Remove the rear axle shaft (10), side collars and rear wheel from the swingarm.

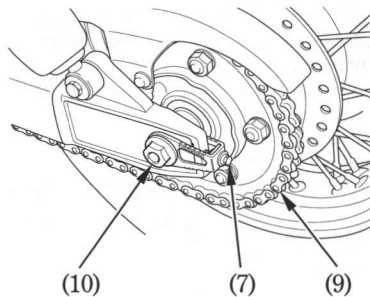

(7) Drive chain
adjusting bolt

(9) Drive chain
(10) Rear axle shaft