




If You Have a Flat Tire

2. Align the index line (6) of the front axle shaft with the recessed surface (7) of the fork leg.

LEFT FRONT

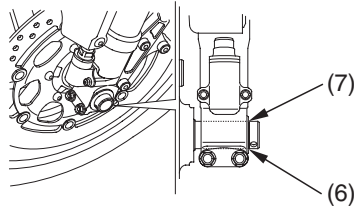

(6) index line
(7) surface of fork leg

3. Tighten the axle pinch bolts on the left fork leg to the specified torque:
16 lbf·ft (22 N·m , 2.2 kgf·m)
4. Tighten the front axle bolt to the specified torque:
44 lbf·ft (59 N·m , 6.0 kgf·m)

5. Install the brake caliper onto the fork leg.
To avoid damaging the brake pads, carefully fit the brake disc (8) between the pads.
6. Install the caliper fixing bolts and tighten to the specified torque:
22 lbf·ft (30 N·m , 3.1 kgf·m)
7. Operate the front brake and pump the fork several times. Check for free wheel rotation after the brake is released. Recheck the wheel if the brake drags or the wheel does not rotate freely.



178 Taking Care of the Unexpected

