


# Safety Labels

< For USA >

TIRE INFORMATION			
COLD TIRE PRESSURES :			
[UP TO MAXIMUM WEIGHT CAPACITY]	FRONT	225kPa	2.25kgf/cm <sup>2</sup> 33psi.
	REAR	290kPa	2.90kgf/cm <sup>2</sup> 42psi.
[ UP TO 90kg(200lbs.) LOAD]			
	FRONT	225kPa	2.25kgf/cm <sup>2</sup> 33psi.
	REAR	290kPa	2.90kgf/cm <sup>2</sup> 42psi.
MAXIMUM WEIGHT CAPACITY : 182 kg ( 401 lbs )			
TIRE SIZE : FRONT 130/70R18M/C 63V REAR 180/55R18M/C 74V			
TIRE BRAND	FRONT	REAR	Read Owner's Manual
DUNLOP	D251F	D251	
MIN.RECOMMEND TIRE CENTER TREAD DEPTH		THIS MOTORCYCLE IS EQUIPPED	
FRONT 1.5mm(0.06in.) REAR 2.0mm(0.08in.)		WITH TUBELESS TIRES.	

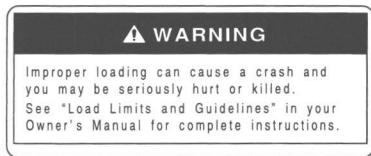

< For Canada >

TIRE INFORMATION			
COLD TIRE PRESSURES :			
[UP TO MAXIMUM WEIGHT CAPACITY]	FRONT	225kPa	2.25kgf/cm <sup>2</sup> 33psi.
	REAR	290kPa	2.90kgf/cm <sup>2</sup> 42psi.
[ UP TO 90kg(200lbs.) LOAD]			
	FRONT	225kPa	2.25kgf/cm <sup>2</sup> 33psi.
	REAR	290kPa	2.90kgf/cm <sup>2</sup> 42psi.
MAXIMUM WEIGHT CAPACITY : 186 kg ( 410 lbs )			
TIRE SIZE : FRONT 130/70R18M/C 63V REAR 180/55R18M/C 74V			
TIRE BRAND	FRONT	REAR	Read Owner's Manual
DUNLOP	D251F	D251	
MIN.RECOMMEND TIRE CENTER TREAD DEPTH		THIS MOTORCYCLE IS EQUIPPED	
FRONT 1.5mm(0.06in.) REAR 2.0mm(0.08in.)		WITH TUBELESS TIRES.	

