

LEFT HANDLEBAR CONTROLS

Headlight Switch (1)

The headlight switch has two positions; “H”, and “OFF” marked by an orange dot.

H: Headlight and tailing lights on.

OFF (orange dot): Headlight and tailing lights off.

Headlight Dimmer Switch (2)

Move the headlight dimmer switch to “Hi” to select high beam and to “Lo” to select low beam.

Turn Signal Switch (3)


Move to L to signal a left turn, R to signal a right turn. Return to the center (off) when finished.

Horn Button (4)

Press the button to sound the horn. The horn will only operate when the engine is running.

NOTE:

* The lights and horn will be dim when the engine is idling.

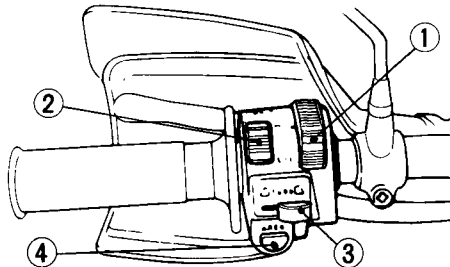

- (1) Headlight switch
- (2) Headlight dimmer switch
- (3) Turn signal switch
- (4) Horn Button