

SPARK PLUG

Refer to the Safety Precautions on page 66 .

Recommended plugs:

Standard:

DPR8Z (NGK) or
X24GPR-U (DENSO)

For extended high speed riding:


DPR9Z (NGK) or
X27GPR-U (DENSO)

For most riding conditions this spark plug heat range number is satisfactory. However, if the motorcycle is going to be operated for extended periods at high speeds or near maximum power in hot climates, the spark plug should be changed to a colder heat range (a higher number).

NOTICE

Never use a spark plug with an improper heat range. Severe engine damage could result.

1. Clean any dirt from around the spark plug base.
2. Disconnect the spark plug cap (1) and remove the spark plug with the multipurpose wrench provided in the tool bag.

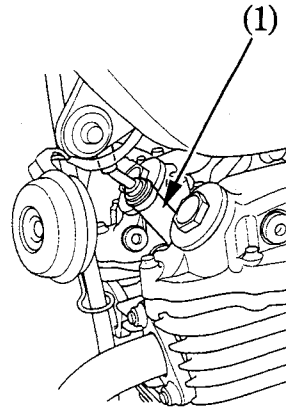

(1) Spark plug cap