


Seat Removal

Refer to *Safety Precautions* on page 47 .

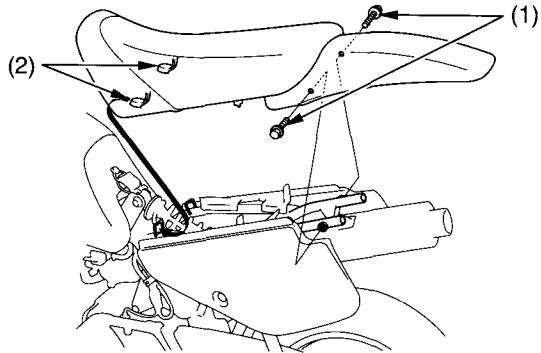

- (1) bolts
- (2) prongs

Removal

1. Remove the bolt (1) on each side of the rear fender.
2. Slide the seat and rear fender back.

Installation

1. Position the prongs under the seat into the spaces for them in the frame.
2. Install the bolts and tighten them.