


# Side Cover Removal

---

Refer to *Safety Precautions* on page 47 .

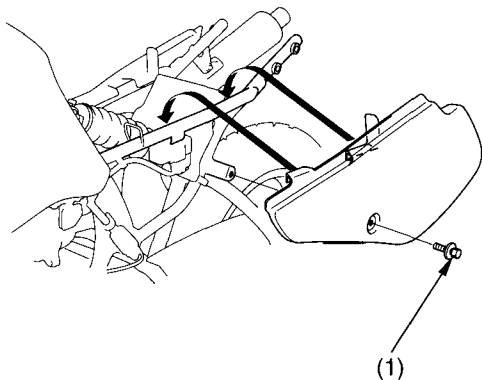

(1) bolt

## Removal

1. Remove the seat (page 57).
2. Remove the bolt ( 1 ) securing the side cover.
3. Pull the side cover up.

## Installation

1. Attach the side cover on the rear frame.
2. Install the securing bolt and tighten it.
3. Install the seat (page 57 ).

Use the same procedure to remove and install the right side cover.