


CARGO LIMIT

2.0kg / 4.5lbs

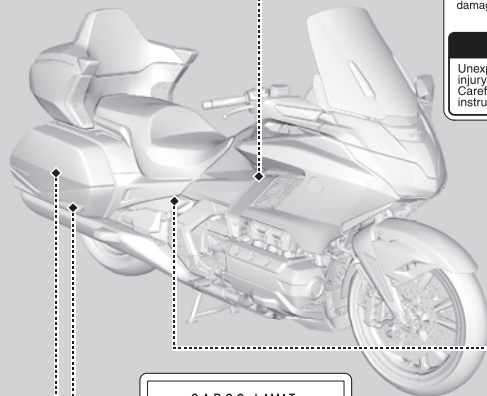

CARGO LIMIT

9.0kg / 20.0lbs

GL1800DA

[EQUIPPED WITH AIRBAGS]

All airbag system wires/connectors are yellow. Disconnecting, tampering with, or using test equipment on any yellow wires or connectors can cause system damage or accidental deployment.

▲ WARNING

Unexpected deployment could cause serious injury to you or others. Carefully follow the Service Manual instructions.


GL1800/D

Cargo Limit

3.0kg / 6.6lbs

CARGO LIMIT

9.0kg / 20.0lbs

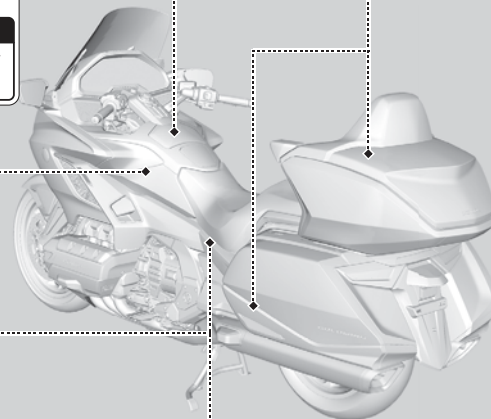

GL1800/D

TIRE INFORMATION

| Cold tire pressures | | kPa | kgf/cm ² | psi |
|-------------------------------|-------|------------------|---------------------|-----|
| Up to maximum weight capacity | Front | 250 | 2.50 | 36 |
| | Rear | 260 | 2.60 | 41 |
| Up to 90kg(200lbs) load | Front | 250 | 2.50 | 36 |
| | Rear | 260 | 2.60 | 41 |
| Tire size | Front | 180/55R16M/C 65H | | |
| | Rear | 200/55R16M/C 77H | | |
| Min. recommend | Front | 1.5mm(0.06in.) | | |
| tire center tread depth, | Rear | 2.0mm(0.08in.) | | |
| Maximum weight capacity | | 192kg(423lbs) | | |

Read owner's manual.

GL1800DA

TIRE INFORMATION

| Cold tire pressures | | kPa | kgf/cm ² | psi |
|-------------------------------|-------|------------------|---------------------|-----|
| Up to maximum weight capacity | Front | 250 | 2.50 | 36 |
| | Rear | 260 | 2.60 | 41 |
| Up to 90kg(200lbs) load | Front | 250 | 2.50 | 36 |
| | Rear | 260 | 2.60 | 41 |
| Tire size | Front | 180/55R16M/C 65H | | |
| | Rear | 200/55R16M/C 77H | | |
| Min. recommend | Front | 1.5mm(0.06in.) | | |
| tire center tread depth, | Rear | 2.0mm(0.08in.) | | |
| Maximum weight capacity | | 189kg(417lbs) | | |

Read owner's manual.

GL1800DA

▲ WARNING

Airbag system wires and connectors are yellow. Tampering with, cutting, splicing, or disconnecting yellow wires/connectors could cause airbag deployment or a system failure resulting in serious injury or death.